

## TECHNICAL INFORMATION BULLETIN ELECTRONIC CFL BALLAST PROGRAM START

### ORDERING INFORMATION

Order code: 31278  
Description: E22142-120-277-TDE FLX  
Internal code: E22142-120-277-TDE  
UPC: 69549312784


### GENERAL INFORMATION

Ballast type: Electronic  
Starting method: Program Start  
Lamp connection: Series  
Input voltage: 120-277V  
Input frequency: 50/60HZ  
Status: Active  
Safety approval: 31278STD




Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD %	Power factor	Max. lamp current crest factor	B.E.F.
26W TTT	2	26	-22/-30	0.45	54	1.00	10	0.99	1.7	1.85
26W DTT	2	26	-22/-30	0.43	51	1.00	10	0.99	1.7	1.96
21W 2D	2	21	-22/-30	0.42	50	1.12	10	0.98	1.7	2.24
27W TTL	2	27	-22/-30	0.41	48	0.93	10	0.99	1.7	1.94
42W TTT	1	42	-22/-30	0.37	45	0.98	10	0.99	1.7	2.18
32W TTT	1	32	-22/-30	0.31	35	0.98	10	0.99	1.7	2.80
26W TTT	1	26	-22/-30	0.24	29	1.10	10	0.99	1.7	3.79
26W DTT	1	26	-22/-30	0.23	27	1.00	10	0.99	1.7	3.70
38W 2D	1	38	-22/-30	0.26	31	0.85	10	0.99	1.7	2.74
28W 2D	1	28	-22/-30	0.23	28	1.00	10	0.99	1.7	3.57
FC9T5	1	22	-22/-30	0.21	25	1.00	10	0.99	1.7	4.00
FC12T5	1	40	-22/-30	0.32	38	0.95	10	0.99	1.7	2.50

### WIRING DIAGRAM

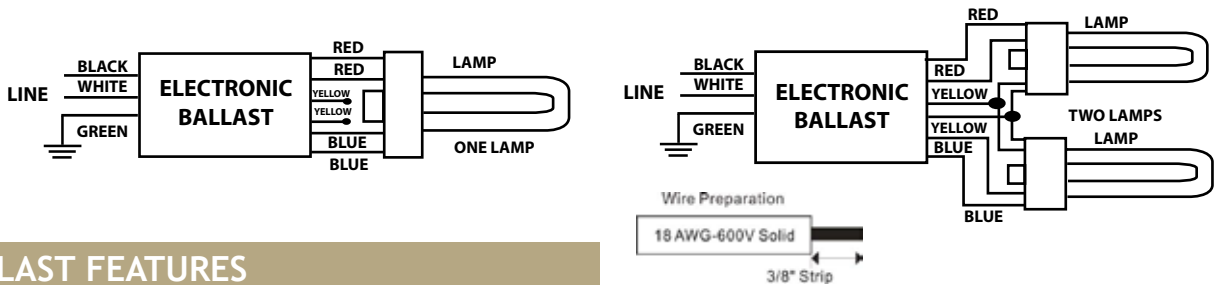

### BALLAST FEATURES

Length (L)	Width (W)	Height (H)	Mounting (M)
12.5 cm	6.4 cm	2.9 cm	11.4 cm
4.92 in	2.51 in	1.14 in	4.49 in

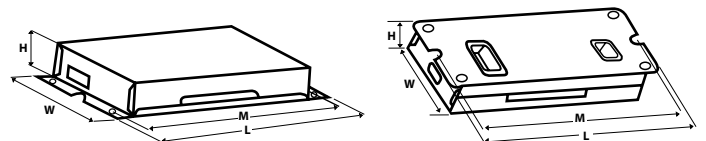

### WARRANTY:

Ballast warranty of 5 years for electronic ballast 70 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



www.standardpro.com